

Intelligent Protection of Life Science

# -86°C ULT Freezer

## DW-86L338J



### GENERAL

Storage Capacity(L/Cu.Ft)		338/11.9
Temperature Range(°C)		-40 ~ -86
Noise (dB(A))		50
Net/Gross Weight (kg)		238/278
Exterior Dimensions(W*D*H)	mm	830*893*1846
	in	32.7*35.2*72.7
Interior Dimensions (W*D*H)	mm	465*630*1165
	in	18.3*24.8*45.9

### ENVIRONMENTAL & ELECTRICAL DATA

Electrical Power (V/Hz)	220 ~ 240/50
Power Consumption (kW-hr/day)	7.5
Electrical Current (A)	7.5
Building Supply Rating (A)	16
Power Lead Length (m)	2.5
Heat Rejection (BTU/day)	25591(stable operation)
Ambient Temperature	10°C ~ 32°C

### REFRIGERATION CONFIGURATION

Refrigeration System Type	Direct Cooling
Compressor Type/Brand/Number	Hermetic Reciprocating Type/SECOP/2
Compressor Capacity(W)	950
Evaporator Type	Cold Wall With Enhanced Heat Transfer Treatment
Defrost Method	Manual
Refrigerant Charge/Flammable	R290 in 1st Stage /R170 in 2nd Stage / Flammable

CONTROLLER/ELECTRICAL SYSTEM FEATURES

Controller Level	Top
Power Switch	On-Off with Circuit Breaker
Controller Type	Microprocessor Control, Bright LED Display, USB Data Export
Setpoint Security	Yes
Controller Sensor	PT100
Remote Alarm Terminals	Remote Alarm Port,RS232/RS485 (Optional)
Adjustable High/Low Temp Alarms	Adjustable

CONSTRUCTION

Insulation	VIP+LBA Foaming Agent
Exterior Door Seal	Four Seal On the Outside Door Seal Strip
Interior Door Seal	One Seal On the Interior Door Seal Strip
Shelves/Capacity/Dims/Material	3 stainless steel adjustable shelves with dimension 451*597 mm(W*D), max capacity per shelf:50 kg,110.2 lbs
Casters	All-direction caster with fixing stand
Exterior Material	Color Coating Cold Plate Steel
Interior Material	Color Coating Electric Zinc Steel Plate
Door Thickness	90mm
Cabinet Thickness	130mm
Inner Door	Double Solid Door
Condenser Type	Finned and Forced-Air Cooled
Fan Brand	EBM
Back Up Battery For Alarm Functions	Support high/low temperature, power failure, ajar, sensor failure, high ambient temperature, hot condenser and low battery alarms


PERFORMANCE

Temperature Uniformity(°C)	+2.9/-3.9
Temperature Accuracy(°C)	1
Cool Down Time (25 °C ambient to -80 °C) mins	240
Warm Up Time (25 °C ambient -80 °C to -50 °C) mins	200
1 Min Door Open Recovery Time (ambient 25 °C running temp -75 °C)mins	30


CERTIFICATE

CE

TYPICAL PERFORMANCE CHARACTERISTICS IN 25 °C AMBIENT

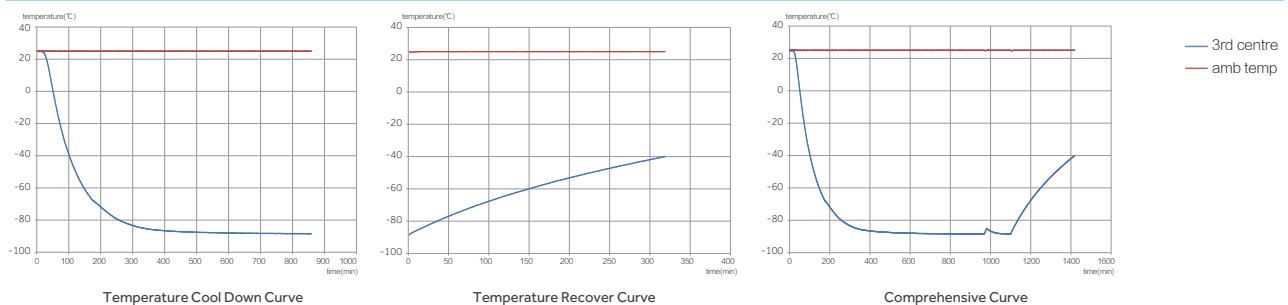


PRODUCT DIMENSION DRAWINGS

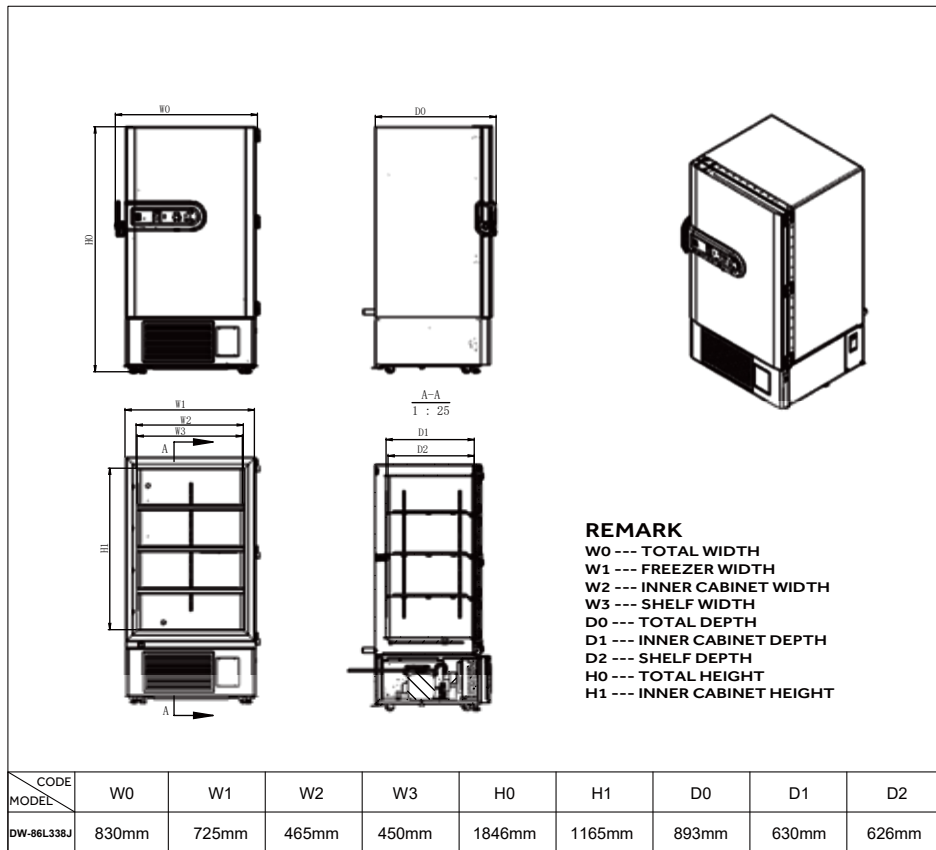


TYPICAL CABINET TEMPERATURE MAP

Top view of shelves

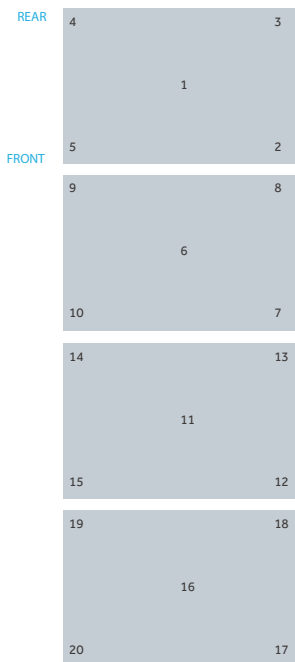

Front view of shelves

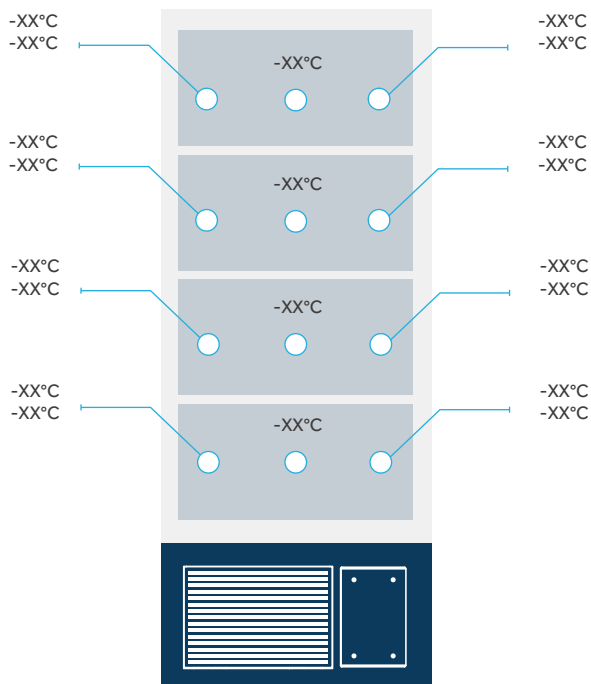

°C	1	2	3	4	5	6	7	8	9	10
Max.	-80.2	-78	-77.8	-77.8	-77.8	-79.3	-79.5	-79.6	-79.4	-79.5
Min.	-83	-82.1	-82.5	-82.2	-82	-81.9	-83.2	-83.8	-83.9	-83.4
Avg.	-81.6	-80.1	-80.2	-80	-79.9	-80.6	-81.4	-81.7	-81.7	-81.5

°C	11	12	13	14	15	16	17	18	19	20
Max.	-78.7	-79.2	-78.7	-79.5	-78.8	-77.1	-78	-78.6	-78.9	-78.1
Min.	-80.8	-81.9	-81.6	-82.7	-81.6	-79.2	-81	-81.8	-82	-81.1
Avg.	-79.8	-80.6	-80.2	-81.1	-80.2	-78.2	-79.5	-80.2	-80.5	-79.6

\*Typical freezer data based on internal testing.

お問い合わせ:

株式会社ビットストロング 画像営業部  
<https://www.bitstrong.co.jp/>  
 東京都文京区小石川2-25-16 パーソナルハウス 2F  
 TEL:03-3868-5605 FAX:03-3868-5616  
 担当: 中村、藤野  
 また下記Webフォーム  
<https://www.bitstrong.co.jp/contact/>  
 お問い合わせはこちらから  
**[imaging@bitstrong.co.jp](mailto:imaging@bitstrong.co.jp)**