

Product Details




NFC Rights Management

NFC rights management system is designed with an electromagnetic lock with controllable, checkable and traceable flow direction, providing safer blood management



Divided Storage Management

Multiple storage partitions are provided. Management of blood products by types, expiration dates is easy and efficient.

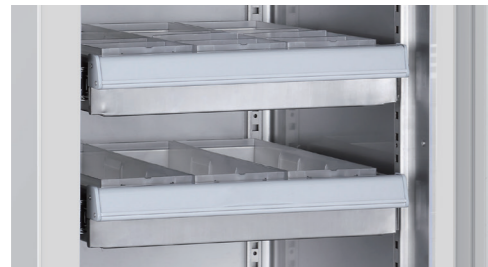

Partition Shelf + Stainless Steel Slide

Partitions can be installed in shelves for dedicated spaces for different blood type. Stainless steel slides provide easier and faster access of blood bags.



Foam Door with Three-pane Viewing Glass

Doors can be foam door with a large three-pane or double-pane viewing glasses, both with Low-E film to improve thermal efficiency with no condensation at 25 C, 85% RH humid condition.

Product Parameters

| Model | Voltage (V/Hz) | Internal Temperature (°C) | External Dimension (width*depth*height mm) | Internal Dimension (width*depth*height mm) | Effective Volume(L) | NW/GW (Kg) | Drawer | Loading Capacity (400ml) |
|-----------|----------------|---------------------------|--|--|---------------------|------------|------------------|--------------------------|
| HXC-149T | 220/50 | 4±1 | 625*820*1130 | 506*560*610 | 149 | 108/133 | 2 Layers | 60Bags |
| HXC-429T | 220/50 | 4±1 | 625*940*1830 | 505*680*1315 | 429 | 182/222 | 5Layers(6Layers) | 195Bags |
| HXC-629T | 220/50 | 4±1 | 765*940*1970 | 644*680*1456 | 629 | 212/257 | 6Layers(7Layers) | 312Bags |
| HXC-1369T | 220/50 | 4±1 | 1545*940*1970 | 1425*680*1456 | 1369 | 386/450 | 6Layers(7Layers) | 624Bags |

| Model | Voltage (V/Hz) | Internal Temperature (°C) | External Dimension (width*depth*height mm) | Internal Dimension (width*depth*height mm) | Effective Volume(L) | NW/GW (Kg) | Drawer | Loading Capacity (400ml) |
|----------|----------------|---------------------------|--|--|---------------------|------------|------------------|--------------------------|
| HXC-149 | 220/50 | 4±1 | 625*820*1130 | 506*560*610 | 149 | 97/122 | 2 Layers | 60Bags |
| HXC-429 | 220/50 | 4±1 | 625*940*1830 | 505*680*1315 | 429 | 169/209 | 5Layers(6Layers) | 195Bags |
| HXC-629 | 220/50 | 4±1 | 765*940*1970 | 644*680*1456 | 629 | 187/232 | 6Layers(7Layers) | 312Bags |
| HXC-1369 | 220/50 | 4±1 | 1545*940*1970 | 1425*680*1456 | 1369 | 335/399 | 6Layers(7Layers) | 624Bags |

株式会社ビットストロング 画像営業部
<https://www.bitstrong.co.jp/>
 東京都文京区小石川2-25-16 パーソナルハウス 2F
 TEL:03-3868-5605 FAX:03-3868-5616
 担当: 中村、藤野
 また下記Webフォーム
<https://www.bitstrong.co.jp/contact/>
 お問い合わせはこちらから
imaging@bitstrong.co.jp

bitstrong Biomedical Blood Bank Refrigerator

Smart IoT Management
High Efficiency & Air Cooling, Constant Temperature with Precision Control



- Inverter compressor with energy saving and noise reduction functions
- Equipped with IoT module to realize real-time monitoring of temperature data
- Applicable for WMS, enabling intelligent and precise blood management
- Options for fingerprint and NFC lock, providing intelligent protection for blood safety data

Smart IoT Management

Real-time control and monitoring of blood information in the cabinet is possible via built-in smart blood management APP and cloud network connection. Blood product information and temperature are available in large LCD display.



HXC-1369T HXC-629T HXC-429T HXC-149T

Product Advantages

Control Interface

The simple and intuitive high-definition LCD touch screen can display temperature graph, working status, events and alarm record.



Real-time Control of Internal Temperature

A dual control system of six high-precision sensors and mechanical thermostat work ensures the temperature inside the cabinet within the range of 4 +/- 1°C. Built-in cold chain monitoring module monitors internal temperature in real-time, records historical data, and alerts abnormal temperature conditions.

Stable and Reliable Operation

The refrigeration system is powered with a high quality inverter compressor and variable speed fan motors. Temperature control responds quickly and reliably for a more uniform temperature with less power and lower noise.



Multiple safety protection

Multiple alarms include high and low temperature, power failure, door ajar, sensor failure, and low battery. Sound buzzer, light flashing and remote alarm contacts are standard alarm features. Built-in battery can continue to support the alarm system when there is a loss of power supply. Fingerprint and NFC punch card module are also standard.



Dual Temperature Control Technology

Refrigeration system is designed with an inverter compressor and dual-speed fans, providing an optimal temperature performance of 4 +/- 1°C inside the cabinet to safeguard stored products.




HXC-1369 HXC-629 HXC-429 HXC-149

Product Advantages

With Multiple Temperature Control to Guarantee Constant and Precise Temperature

The inside temperature is constant within 4±1°C, the digital temperature display resolution at 0.1°C.

It is equipped with 6 high-precision sensors and added with mechanical thermostat for low temperature resistance, providing more accurate air cooling design with dual temperature control to ensure uniform temperature inside the box, and maintain the temperature within the specified temperature range. The multi-layer inner door design reduces the leakage of the cold after door opening and ensures the temperature stability inside the cabinet.

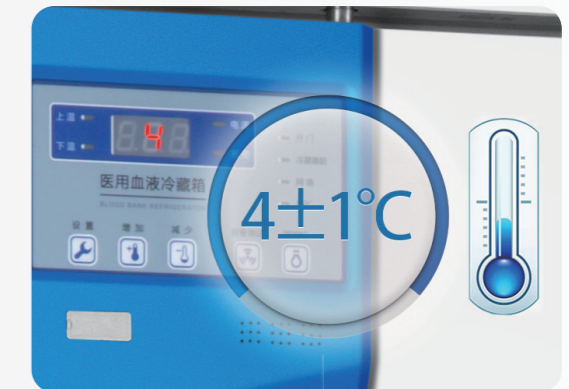

With Multiple Safety Guarantees to Provide Worry-Free Service

It is equipped with complete alarm function, including alarm on high and low temperature, power failure, door opening, sensor failure, and low battery. There are two alarm modes including sound buzzer and light flashing with remote alarm interface.

The rear battery design can continue to alarm and display the temperature inside the cabinet after power failure.

It is equipped with NFC punch card module, with safer storage management.

Standard USB Interface

Can record temperature data for ten years, and an optional disc temperature recorder can be provided at your selection.

