

SPECIFICATION

A: MATERIAL:







- 1.HOUSING: PA
- 2.COVER: PA
- 3.TERMINAL: COPPER ALLOY

B: CHARACTERISTICS:

- 1. RATING: 15A 125V~ UL PSE
- 2. INSULATION RESISTANCE: 100MΩ MIN, AT 500V DC
- 3. ELECTRIC STRENGTH: AC 2000V FOR ONE MINUTE

C: APPROVALS:

UL, CUL,PSE

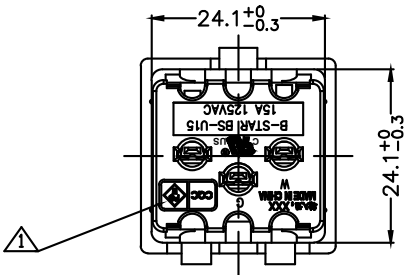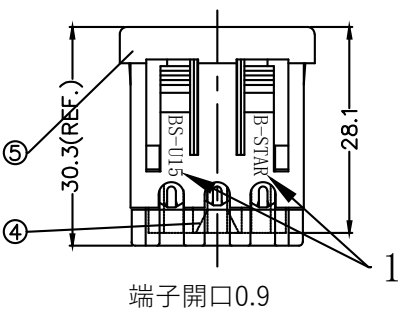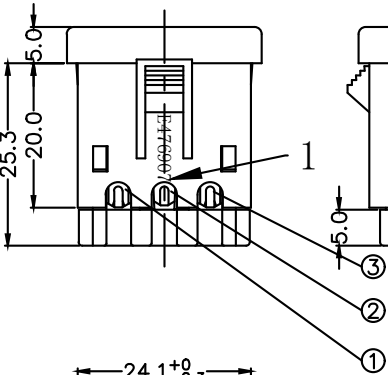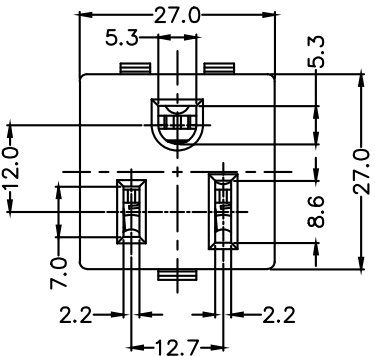

8			
7			
6			
5	Body Insulator PA	1	
4	Bottom cover Insulator PA	1	
3	3#Terminal 0.4t Ni-Plated(R)	1	
2	1#Terminal 0.4t Wash Finish	1	
1	2#Terminal 0.4t Wash Finish (L)	1	
5			
4			
3			
2			
1	增加识别	李付彬	19/10/28
NO.	DESCRIPTION	APPROVED	DATE

GENERAL TOLERANCE(PLASTICS)		Approved	Checked	Designed	Drawn	ALL SIZE ARE IN MM			
GRADATION	TOLERANCE	Andy-Lee	Dick	L F B	L F B	SCALE	1.000		
X	±0.4					MATERIAL NO.		DRAWING NO.	REV.
X.X	±0.3					BS-ST-1516-B		BSWIC1026	A
X.XX	±0.1								
ANGLE	±1°								
									