

SPECIFICATION

A: MATERIAL:






- 1.HOUSING: PC
- 2.COVER: PA
- 3.TERMINAL: COPPER ALLOY

B: CHARACTERISTICS:

- 1. RATING: 15A 125V~ UL
- 2. INSULATION RESISTANCE: 100MΩ MIN, AT 500V DC
- 3. ELECTRIC STRENGTH: AC 2000V FOR ONE MINUTE

C: APPROVALS:

UL, CUL

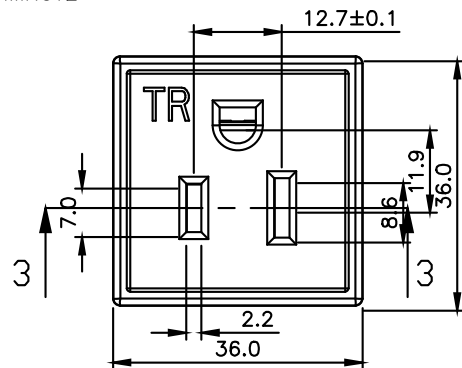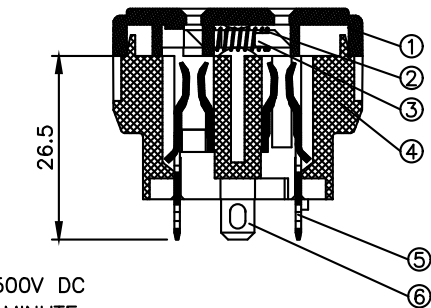

8			
7			
6	1#Terminal 0.8t Tin-Plated t=3~5um	1	
5	2#Terminal 0.8t Tin-Plated t=3~5um	2	
4	Body Insulator PC	1	
3	Protective door Insulator POM	2	
2	Spring Insulator SUS304	1	
1	Cover Insulator PC	1	
5			
4			
3			
2			
1			
NO.	DESCRIPTION	APPROVED	DATE

GENERAL TOLERANCE(PLASTICS)		Approved	Checked	Designed	Drawn	ALL SIZE ARE IN MM			
GRADATION	TOLERANCE	Andy-Lee	Dick	Champion	Champion	SCALE		1.000	
X	±0.4					MATERIAL NO.		DRAWING NO.	REV
X.X	±0.3					BS-ST-1548B2-B		BSWIC1075	A
X.XX	±0.1								
ANGLE	±1°								