

SPECIFICATION

A: MATERIAL:



- 1.HOUSING: PA
- 2.COVER: PA
- 3.TERMINAL: COPPER ALLOY

B: CHARACTERISTICS:


1. RATING: 15A 125V~ UL PSE
2. INSULATION RESISTANCE: 100MΩ MIN, AT 500V DC
3. ELECTRIC STRENGTH: AC 2000V FOR ONE MINUTE
4. Life test: 6000 cycles

C: APPROVALS:





UL, CUL, PSE

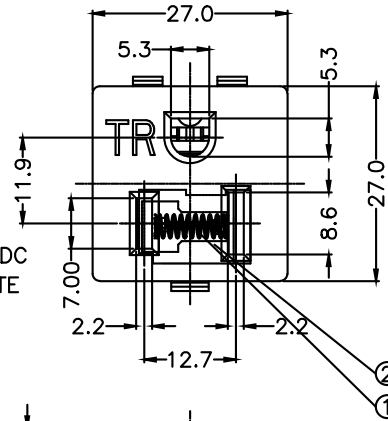

PANEL CUT-OUT

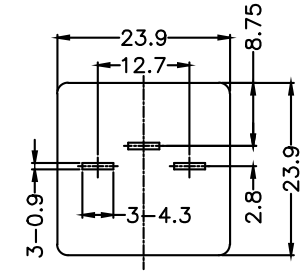

PANEL CUT-OUT(PCB)

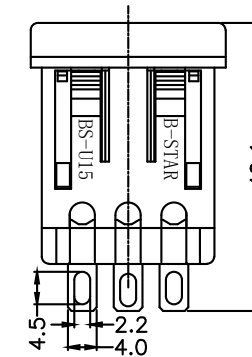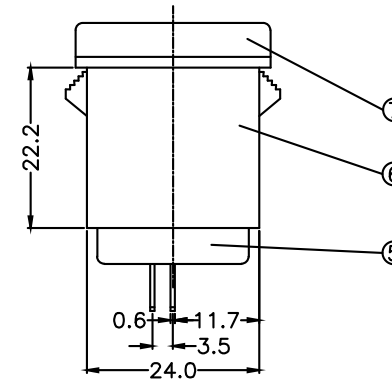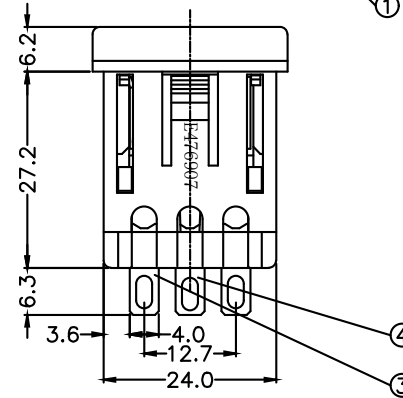

8			
7	Cover Insulator PPA66	1	
6	Body Insulator PA66	1	
5	Bottom cover Insulator PA66	1	
4	1#Terminal 0.6t Tin-Plated	1	
3	2#Terminal 0.6t Tin-Plated	2	
2	Protective door Insulator POM	1	
1	Spring Insulator SUS304	1	
5			
4			
3			
2			
1	增加PSE刻字	LFB	2023/6/21
NO.	DESCRIPTION	APPROVED	DATE

GENERAL TOLERANCE(PLASTICS)		Approved	Checked	Designed	Drawn	ALL SIZE ARE IN		MM			
GRADATION	TOLERANCE	Andy-Lee	HZQ	L F B	L F B	SCALE		1.000	DRAWING NO.	REV.	
X	±0.4					MATERIAL NO.					
X.X	±0.3					BS-ST-1540B-BA		BSWIC1115			A
X.XX	±0.1										
ANGLE	±1°										