


## BS-K5604A-3XF/V Face Recognition Terminal

BS-K5604A-3XF/V face recognition terminal is a kind of access control device integrated with fever screening function, which supports plug & play (rapid deployment, free of wiring, installation, or configuration). It can fast take body temperature, which can be widely applied in multiple scenarios, such as enterprises, stations, dwellings, factories, schools, campus and so on.



### Available Model

BS-K5604A-3XF/V

### Features

- Plug & play  
Supports rapid deployment. Free of wiring, installation, or configuration.
- Supports Vanadium Oxide uncooled sensor to measure target's temperature
- Temperature measuring range: 30 °C to 45 °C (86 °F to 113 °F), accuracy:  $\pm 0.5$  °C without black body calibration
- Recognition distance: 0.3 to 2 m
- Fast temperature measurement mode: Detects face and takes body temperature without identity authentication
- Multiple authentication modes with temperature measure are available
- Face mask wearing alert
- If the recognizing face does not wear a mask, the device will prompt a voice reminder. At the same time, the authentication or attendance is valid.
- Forced mask wearing alert  
If the recognizing face does not wear a mask, the device will prompt a voice reminder. At the same time, the authentication or attendance will be failed.
- Displays temperature measurement results on the authentication page
- Triggers voice prompt when detecting fever
- Configurable door status (open/close) when detecting fever
- Transmits online and offline temperature information to the client software via TCP/IP communication and saves the data on the client software
- Integrated design with stand bracket


- Communicates with the third-party turnstile via IO output or Wiegand
  - Adjustable supplement light brightness
  - High performance processor with deep learning algorithm
  - 50,000 face capacity, 100,000 event capacity
  - Face recognition duration  $\leq 0.2$  s/User; face recognition accuracy rate  $\geq 99\%$
  - Transmits and saves the comparison results and the captured pictures to the client software or others
  - NTP, manually time synchronization, and auto synchronization
  - Watchdog design for protecting the device and ensuring device running properly
  - Audio prompt for authentication result
- \* **Biometric recognition products are not 100% applicable to anti-spoofing environments. If you require a higher security level, use multiple authentication modes**

## Specifications

Model		BS-K5604A-3XF/V
Operation system		Linux
Temperature measurement	Sensor	Vanadium Oxide uncooled sensor
	Resolution	120 × 160
	Frame rate	25 fps
	Temperature range	30 °C to 45 °C (86 °F to 113 °F)
	Temperature accuracy	$\pm 0.5$ °C, without black body calibration
	Measuring distance	0.3 to 2 m
Screen	Screen	10.1-inch touch screen
	Resolution	1024 × 600
Camera		2 MP dual-lens camera
Face	Recognition distance	0.3 m to 2 m
	Recognition duration	$< 0.2$ s
	Face anti-spoofing	Support
Capacity	Face capacity	50,000
	Event capacity	100,000
Communication		TCP/IP, Wi-Fi
Interface		LAN × 1, RS-485 × 1, Wiegand × 1, USB × 2, IO output × 1, IO input × 2, lock × 1, door contact × 1, TAMPER × 1
Other	Audio prompt	Support
	Two-way audio	Support
	Power supply	12 VDC/2 A
	Working humidity	10 to 90% (no condensing)
	Working temperature	0 °C to 50 °C (32 °F to 122 °F)

\* Exposing the equipment to direct sun light, low ventilation or heat source such as heater or radiator is forbidden (ignorance can cause fire danger).

## Dimensions

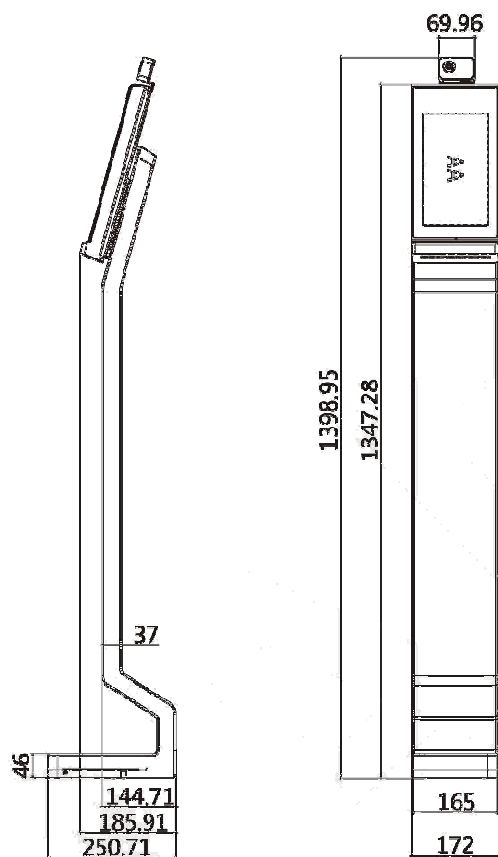

**お問合せ:**

**発売元:**

株式会社ビットstrong 画像営業部

<https://www.bitstrong.co.jp/>

〒112-0002 東京都文京区小石川2-25-16  
パーソナルハウス2F

TEL:03-3868-5605 FAX:03-3868-5616

お問合せはこちらから

[imaging@bitstrong.co.jp](mailto:imaging@bitstrong.co.jp)

担当: 中村、門 (モン)

また下記Webフォーム

<https://www.bitstrong.co.jp/store/contact/>