

SPECIFICATION

A: MATERIAL:







- 1.HOUSING: PA
- 2.COVER: PA
- 3.TERMINAL: COPPER ALLOY

B: CHARACTERISTICS:

- 1. RATING: 15A 125V~ UL
- 2. INSULATION RESISTANCE: 100MΩ MIN, AT 500V DC
- 3. ELECTRIC STRENGTH: AC 2000V FOR ONE MINUTE

C: APPROVALS:

UL, CUL, PSE

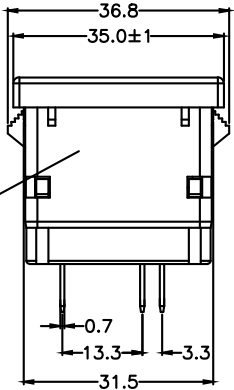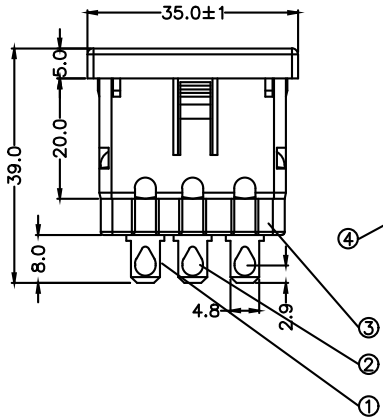

8		
7		
6		
5		
4	Body Insulator PA66	1
3	Bottom cover Insulator PA66	1
2	1#Terminal 0.7t Tin-Plated	1
1	2#Terminal 0.7t Tin-Plated(L)	2
5		
4		
3		
2		
1		
NO.	DESCRIPTION	APPROVED
		DATE

GENERAL TOLERANCE(PLASTICS)	
GRADATION	TOLERANCE
X	±0.4
X.X	±0.3
X.XX	±0.1
ANGLE	±1°

Approved	Checked	Designed	Drawn
Andy-Lee	HZQ	LFB	LFB
bitstrong			

ALL SIZE ARE IN	MM
SCALE	1.000
MATERIAL NO.	
BS-ST-1548A-BA61	

	DRAWING NO.
	BSWIC1181