

SPECIFICATION

A: MATERIAL:




- 1.HOUSING: PA
- 2.COVER: PA
- 3.TERMINAL: COPPER ALLOY

B: CHARACTERISTICS:





- 1. RATING: 20A 125V~ UL
- 2. INSULATION RESISTANCE: 100MΩ MIN, AT 500V DC
- 3. ELECTRIC STRENGTH: AC 2000V FOR ONE MINUTE

C: APPROVALS:

UL, CUL,PSE



PANEL CUT-OUT

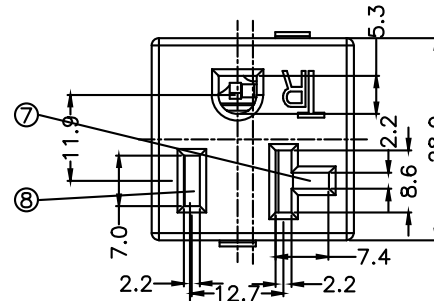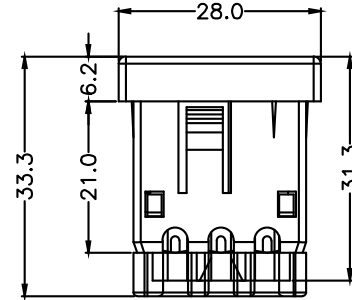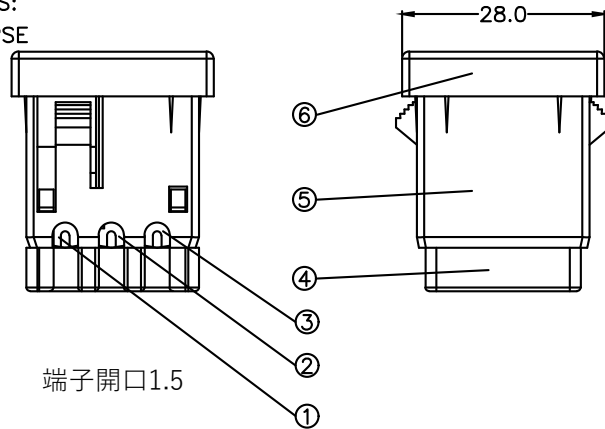

8	Protective R door Insulator PA	1
7	Protective L door Insulator PA	1
6	Upper cover Insulator PC	1
5	Body Insulator PC	1
4	Bottom cover Insulator PA	1
3	3#Terminal 0.7t Tin-Plated(R)	1
2	1#Terminal 0.7t Tin-Plated	1
1	2#Terminal 0.7t Tin-Plated(L)	1

5				GENERAL TOLERANCE(PLASTICS)		Approved	Checked	Designed	Drawn	ALL SIZE ARE IN	MM	
4				GRADATION	TOLERANCE	Andy-Lee	Dick	LFB	LFB	SCALE	1.000	
3				X	±0.4					MATERIAL NO.	DRAWING NO.	
2				X.X	±0.3					BS-ST-2012B-BU	BSWIC1333	
1				X.XX	±0.1							
NO.	DESCRIPTION	APPROVED	DATE	ANGLE	±1°							