


SPECIFICATION

A: MATERIAL:


- 1.HOUSING: PC
- 2.TERMINAL: COPPER ALLOY

B: CHARACTERISTICS:


- 1. RATING: 15A 125V~ UL PSE
- 2. INSULATION RESISTANCE: 100MΩ MIN,
AT 500V DC
- 3. ELECTRIC STRENGTH: AC 2000V FOR
ONE MINUTE

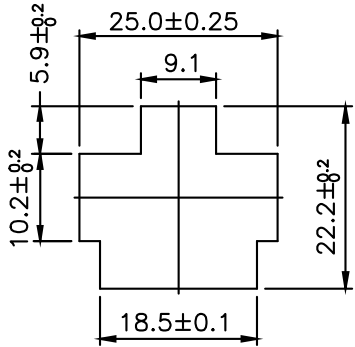

THICKNESS:1.5~2.1

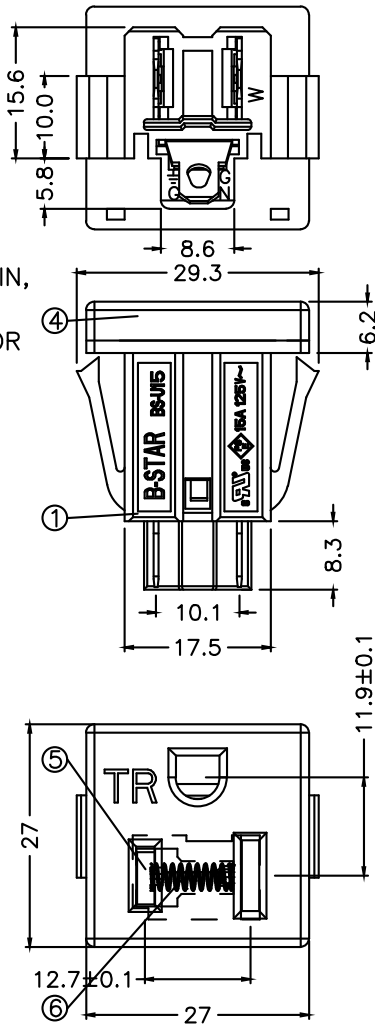

6	Spring Insulator SUS304	1
5	Protective door Insulator PC	1
4	Cover Insulator PC	1
3	Soldering PIN T=0.6mm Tin-Plated	1
2	Soldering PIN T=0.6mm Tin-Plated	2
1	Body Insulator PC/NY Black Color	1

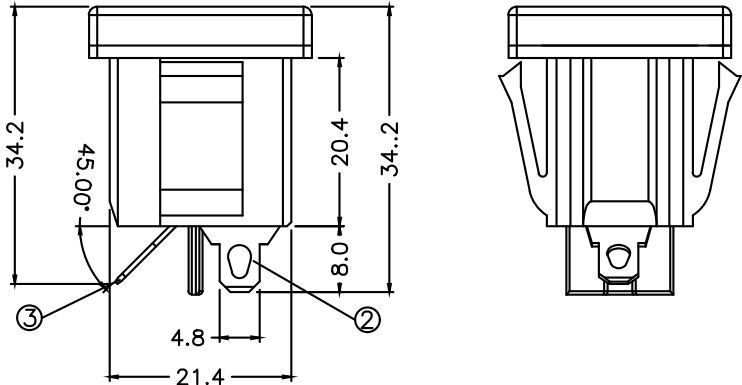

5				GENERAL TOLERANCE(PLASTICS)		Approved	Checked	Designed	Drawn	ALL SIZE ARE IN	MM		
4				GRADATION	TOLERANCE					SCALE	1.000		
3				X	±0.4					MATERIAL NO.		DRAWING NO.	REV.
2				X.X	±0.3					BS-ST-1510B-48B		BSWIC1207	A
1				X.XX	±0.1								
NO.	DESCRIPTION	APPROVED	DATE	ANGLE	±1°	bitstrong							