

SPECIFICATION

A: MATERIAL:



- 1.HOUSING: PA
- 2.COVER: PA
- 3.TERMINAL: COPPER ALLOY

B: CHARACTERISTICS:




- 1. RATING: 20A 125V~ PSE UL
- 2. INSULATION RESISTANCE: 100MΩ MIN, AT 500V DC
- 3. ELECTRIC STRENGTH: AC 2000V FOR ONE MINUTE

C: APPROVALS:

UL, CUL



PANEL CUT-OUT

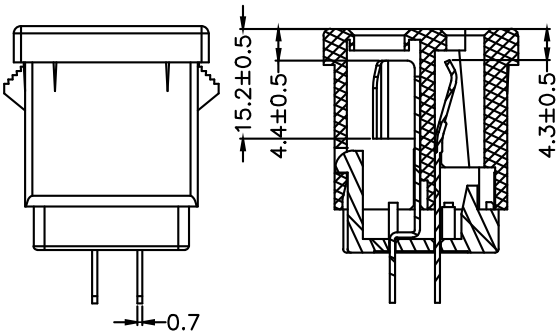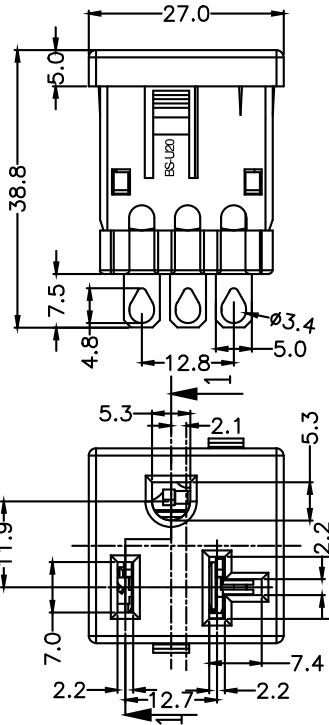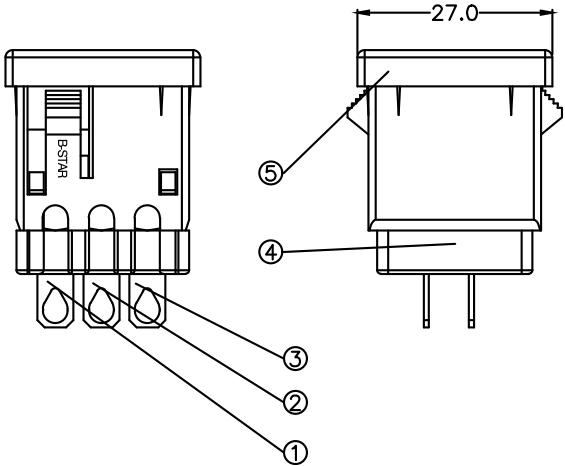

8			
7			
6			
5	Body Insulator PA66	1	
4	Bottom cover Insulator PA66	1	
3	3#Terminal 0.7t Tin-Plated(R)	1	
2	1#Terminal 0.7t Tin-Plated	1	
1	2#Terminal 0.7t Tin-Plated(L)	1	
⑤			
④			
③			
②			
①	38.5 → 38.8	LFB	23/08/15
NO.	DESCRIPTION	APPROVED	DATE

GENERAL TOLERANCE(PLASTICS)		Approved	Checked	Designed	Drawn	ALL SIZE ARE IN MM			
GRADATION	TOLERANCE	Andy-Lee	HZQ	LFB	LFB	SCALE	1.000		
X	±0.4					MATERIAL NO.		DRAWING NO.	REV
X.X	±0.3					BS-ST-2050-BUA		BSWIC1201	A
X.XX	±0.1								
ANGLE	±1°								
									