

SPECIFICATION

A: MATERIAL:



- 1.HOUSING: PA
- 2.COVER: PA
- 3.TERMINAL: COPPER ALLOY

B: CHARACTERISTICS:




- 1. RATING: 15A 125V~ UL
- 2. INSULATION RESISTANCE: 100MΩ MIN, AT 500V DC
- 3. ELECTRIC STRENGTH: AC 2000V FOR ONE MINUTE

C: APPROVALS:


UL, CUL

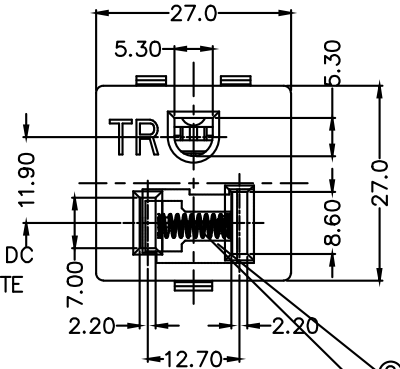

PANEL CUT-OUT

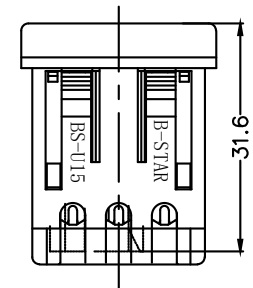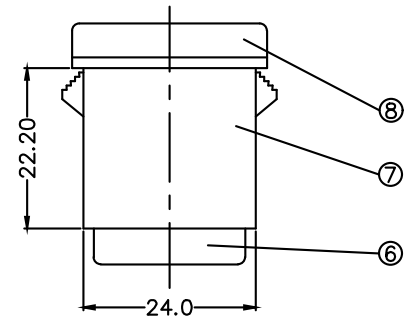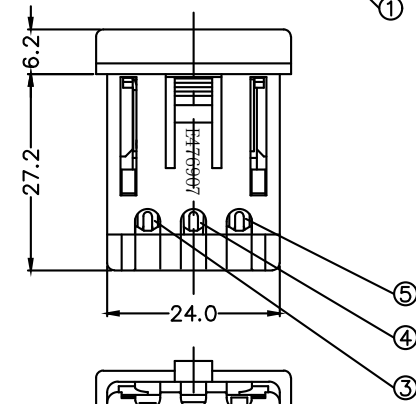

端子開口1.2



8	Cover Insulator PA	1
7	Body Insulator PA	1
6	Bottom cover Insulator PA	1
5	3#Terminal 0.4t Ni-Plated(R)	1
4	1#Terminal 0.4t Wash Finish	1
3	2#Terminal 0.4t Wash Finish (L)	1
2	Protective door Insulator POM	1
1	Spring Insulator SUS304	1

5				GENERAL TOLERANCE(PLASTICS)		Approved	Checked	Designed	Drawn	ALL SIZE ARE IN	MM		
4				GRADATION	TOLERANCE	Andy-Lee	HZQ	L F B	L F B 2 0 1 9 . 1 1 . 6	SCALE	1.000		
3				X	±0.4					MATERIAL NO.		DRAWING NO.	REV.
2				X.X	±0.3								
1	增加PSE	LFB	23/06/26	X.XX	±0.1								
NO.	DESCRIPTION	APPROVED	DATE	ANGLE	±1°					BS-ST-1514B-B		BSWIC1028	A