

SPECIFICATION

A: MATERIAL:

- 1.HOUSING: PA
- 2.COVER: PA
- 3.TERMINAL: COPPER ALLOY




B: CHARACTERISTICS:

- 1. RATING: 15A 125V~ UL PSE
- 2. INSULATION RESISTANCE: 100MΩ MIN, AT 500V DC
- 3. ELECTRIC STRENGTH: AC 2000V FOR ONE MINUTE



C: APPROVALS:

UL, CUL, PSE



GROUND WIRE
WHITE WIRE
BLACK WIRE

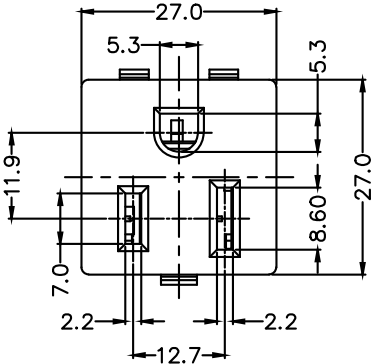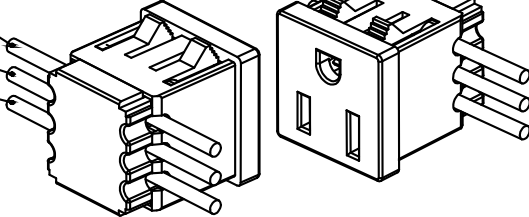

PANEL CUT-OUT

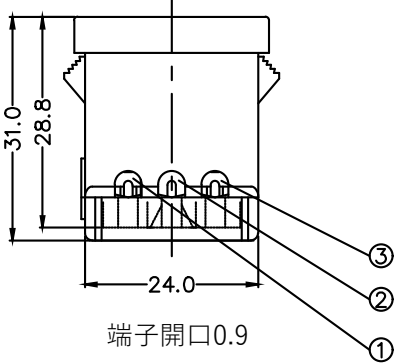

端子開口0.9



8			
7			
6			
5	Body Insulator PA	1	
4	Bottom cover Insulator PA	1	
3	3#Terminal 0.7t Tin-Plated(R)	1	
2	1#Terminal 0.7t Tin-Plated	1	
1	2#Terminal 0.7t Tin-Plated(L)	1	
5			
4			
3			
2			
1			
NO.	DESCRIPTION	APPROVED	DATE

GENERAL TOLERANCE(PLASTICS)		Approved	Checked	Designed	Drawn	ALL SIZE ARE IN MM			
GRADATION	TOLERANCE	Andy-Lee	HZQ	L F B	L F B 2 0 1 9 . 1 1 . 6	SCALE		1.000	
X	±0.4					MATERIAL NO.		DRAWING NO.	REV.
X.X	±0.3					BS-ST-1516A-B		BSWIC1027	A
X.XX	±0.1								
ANGLE	±1°								
									