

SPECIFICATION

A: MATERIAL:







- 1.HOUSING: PA
- 2.COVER: PA
- 3.TERMINAL: COPPER ALLOY

B: CHARACTERISTICS:

- 1. RATING: 20A 125V~ UL PSE
- 2. INSULATION RESISTANCE: 100MΩ MIN, AT 500V DC
- 3. ELECTRIC STRENGTH: AC 2000V FOR ONE MINUTE

C: APPROVALS:

UL, CUL PSE

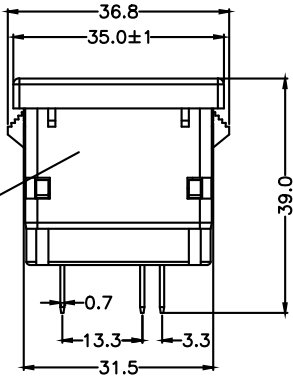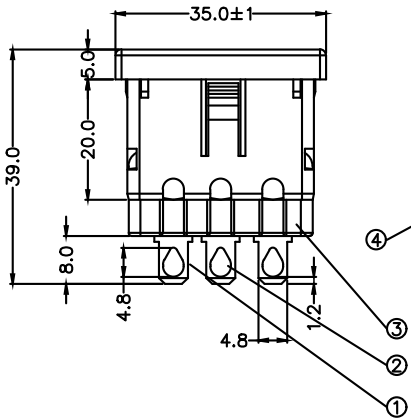

8		
7		
6		
5		
4	Body Insulator PA66	1
3	Bottom cover Insulator PA66	1
2	1#Terminal 0.7t Tin-Plated	1
1	2#Terminal 0.7t Tin-Plated(L)	2
⑤		
④		
③		
②		
①		
NO.	DESCRIPTION	APPROVED DATE

GENERAL TOLERANCE(PLASTICS)		Approved	Checked	Designed	Drawn	ALL SIZE ARE IN MM			
GRADATION	TOLERANCE	Andy-Lee	HZQ	LFB	LFB	SCALE	1.000		
X	±0.4					MATERIAL NO.		DRAWING NO.	
X.X	±0.3					BS-ST-2048A-BA61			
X.XX	±0.1								
ANGLE	±1°					BS-ST-2048A-BA61		BSWIC1189	