


SPECIFICATION

A: MATERIAL:





- 1.HOUSING: NY
- 2.TERMINAL: COPPER ALLOY

B: CHARACTERISTICS:

- 1. RATING: 15A 125V~ UL PSE
- 2. INSULATION RESISTANCE: 100MΩ MIN,
AT 500V DC
- 3. ELECTRIC STRENGTH: AC 2000V FOR
ONE MINUTE

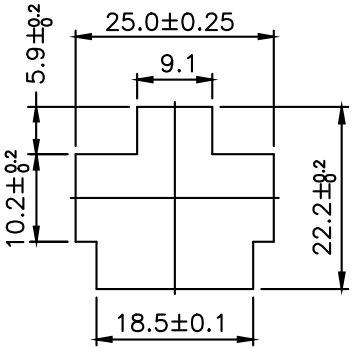

THICKNESS:1.5~2.1

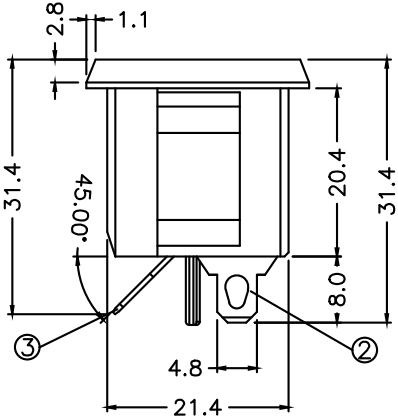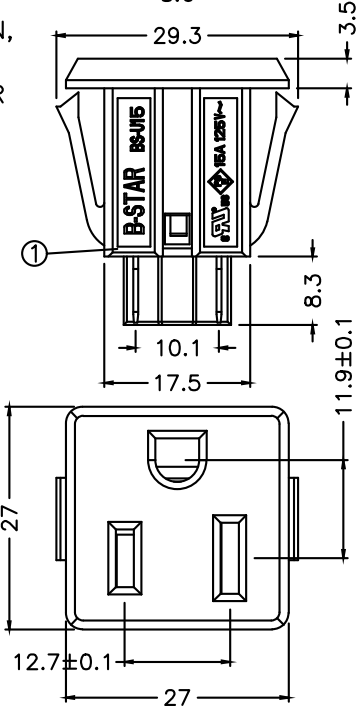

3	Soldering PIN T=0.6mm Tin-Plated		1
2	Soldering PIN T=0.6mm Tin-Plated		2
1	Body Insulator PC/NY Black Color		1
5			
4			
3			
2			
1			
NO.	DESCRIPTION	APPROVED	DATE

GENERAL TOLERANCE(PLASTICS)		Approved	Checked	Designed	Drawn	ALL SIZE ARE IN MM			
GRADATION	TOLERANCE	Andy-Lee	Dick	L F B	L F B	SCALE	1.000		
X	±0.4					MATERIAL NO.		DRAWING NO.	REV.
X.X	±0.3					BS-ST-1510-48B		BSWIC1298	A
X.XX	±0.1								
ANGLE	±1°								